


EXPRESS DUAL 2000



Value. Offers substantial whole-life cost savings

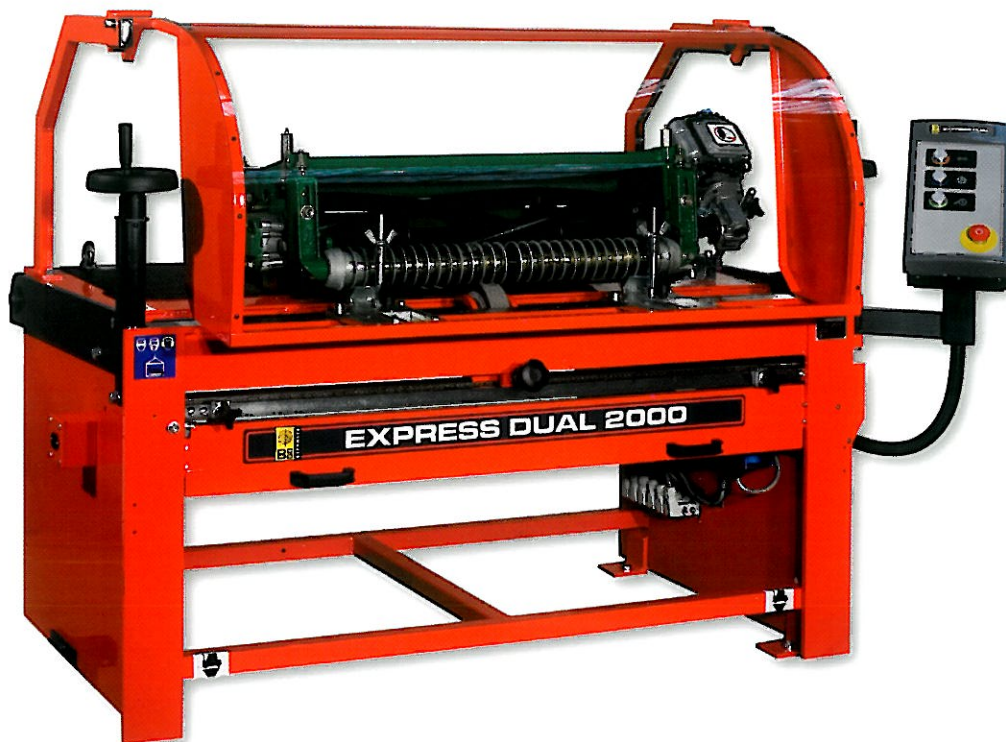

Speed. Delivers a 15-minute turnaround, floor to floor



Accurate. Delivers a clean cut to exceptional tolerances



Safe. Ergonomically designed for operator safety



Reliable. Unsurpassed warranty



Ease. Let the machine work for you



Versatile. Use with any make, type and size of mower

New dimension in reel blade sharpening – economy, speed and simplicity combined

The Express Dual 2000 offers multiple choices at competitive price – all with the unparalleled speed, accuracy and performance of the famous EXPRESS DUAL system.

When the Express Dual 2000 is used in tandem with the Anglemaster 1000 bottom blade grinder, these affordable machines provide a complete in-house facility for the grinding of cylinder mowers at high speed and at minimum cost.

Accuracy of Express Dual system and made to meet your budget needs.

- Rigid, torsionally robust chassis.
- Fast turnaround (Greens unit: from as little as 5 minutes Fairway unit: 15 minutes floor-to-floor).
- Automatic traverse.
- Super safe, self-aligning, torqued controls.
- Options: **Express Lift Table; Express Relief**



Guarding System

CE compliant guard with safety interlock.

Chassis

Simple rigid and robust design with mechanical clamping.



Control system

Simple controls allow balanced, consistent grinding every time.

Spring loaded feed columns

Compensating design supports fast, aggressive grinding with unique auto-relief grinding cut.



Quick and easy mounting

Front roller Vee brackets for quick and efficient mower mounting.



OPTIONAL Lift Table

The Bernhard patented Express Lift Table is ergonomically designed for operator safety. With a lift capacity of 250 kg, operators don't have to perform any heavy lifting.

For more information



www.bernhard.co.uk



info@bernhard.co.uk



1-888 GRIND-IT (474 6348) USA and Canada



+44 1788 811600 UK and Worldwide

Specifications EXPRESS DUAL 2000

Compact, precision machine for spin grinding reels in-frame up to 36" long

Weight: 814 lbs (370kg)

Size: 66" L x 41" W x 54" H (1770 x 1036 x 1373mm)

Length includes clearance for swing of control panel

Optional Lift Table adds 12½" (312mm) closed and 36" (915mm) open

Where specified, guard adds 25" (640 mm) to height when open

